PRO-DIG
Reliability Under Pressure
785.856.2661
www.pro-dig-usa.com

L5K No Bail Lightweight Drive

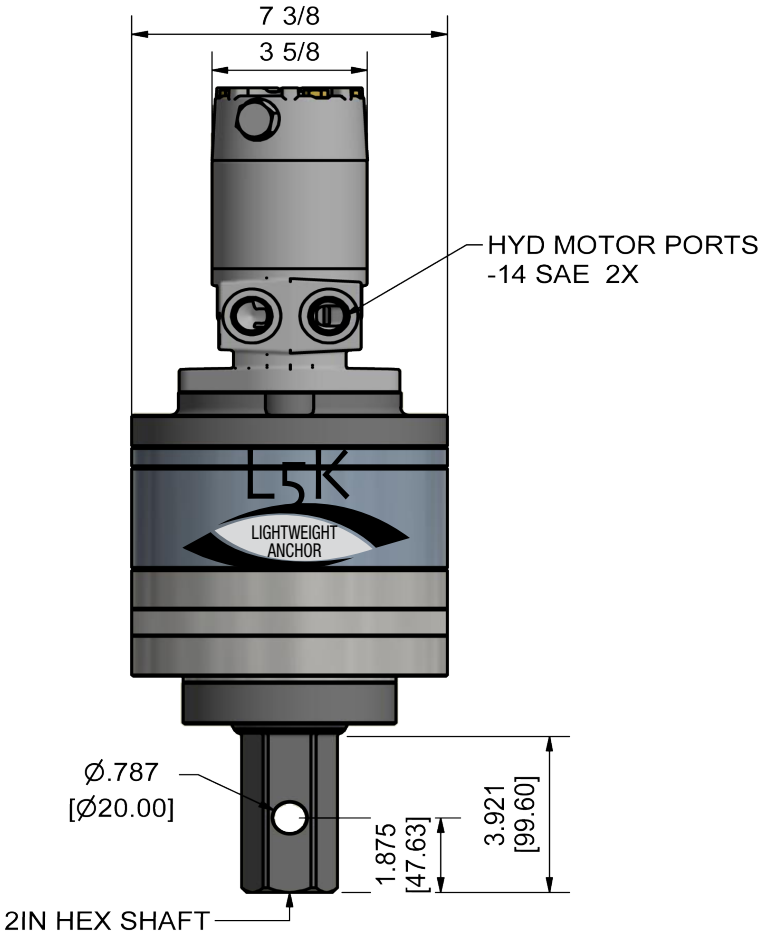

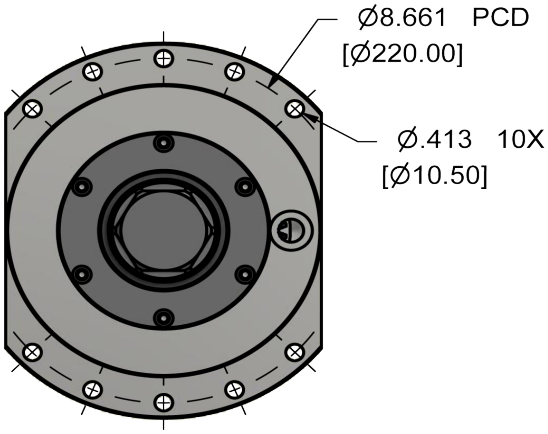

L5K	
Motor Mount	SAE "A" 2 Bolt
Motor	160cc Bidirectional Speed
Min. Hydraulic Flow	5 GPM
Max. Hydraulic Flow	16 GPM
Max. Continuous Pressure	2500 PSI
Output Shaft	2" Hex

OUTPUT SPEED

FLOW GPM (LPM)	SPEED RPM
8	7.2
10	9.4
12	11.5
16	16.4

OUTPUT TORQUE (HIGH TORQUE)

PRESSURE PSI	TORQUE FT/LBS (Nm)
900	1867
1200	2490
1800	3735
2500	5187

DIRECT DRIVE
POWERED BY BLACK BRUIN
MMS
intelli-Tork
Cloud Based Torque Monitor
EZ PILE
DT